

thermostat combination block Vario THK M E G½ AG

Part no. 221 275.101

thermostat combination block

benefits

- fully adjustable
- valve insert can be replaced without system having to be drained
- various versions and sizes for virtually any application

Application

Suitable for medium water volumes. For mounting to compact or bathroom radiators with centre connection in dual-pipe heating systems. Also for installations with copper pipes.

Description

Low-noise thermostat combination block with threaded connection M 30 x 1.5 mm for thermostat control heads and actuators. Mounting cap with valve shut-off function. Fully adjustable with ES-SV adjustment key. Valve spindle with double O ring seal.

Technical Specifications

System connection
see ordering table

Thermostat head/actuator connection
Threaded connection M 30 x 1.5 mm

adjustment range at 10 kPa
12/215 l/h

Nominal pressure
max. 10 bar


Nominal diameter
DN 15

Operating temperature range
Medium: max. 120 °C

Housing
Brass, nickel-plated

Technical Drawings

Vario THK M, straight – version G½ male thread

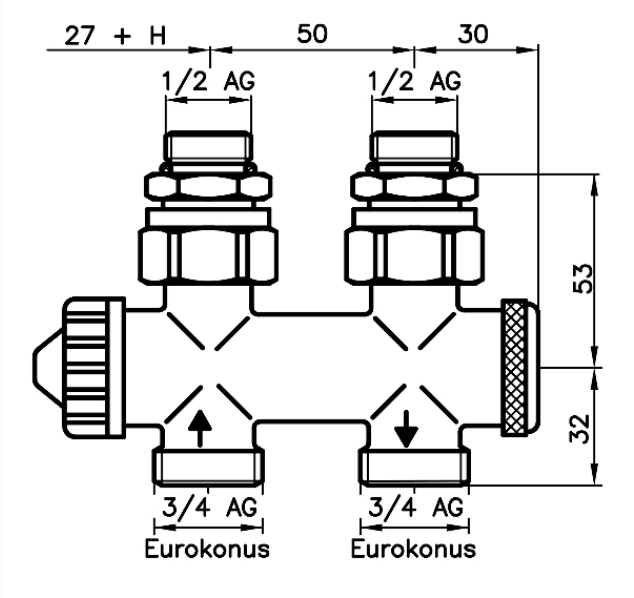

Dimensions (mm)

Versions

			Version	Nominal diameter	Connection to radiator	Connection to pipe	Flow coefficient*	Flow coefficient Kvs**		Part no.
	Vario THK M	for medium water volumes	Straight	DN 15	G½ male	G¾ male eurocone	0.038 – 0.46 m³/h	0.68 m³/h	○	221 275.101

● in-stock items

○ Non-stock items