



## Standard Bourdon tube pressure gauges RF100Dif

**Part no. 85619301**

**Standard Bourdon tube pressure gauges for differential pressure type D3**

### benefits

- Indication of plus pressure, minus pressure and differential pressure
- excellent price/performance ratio
- two independent Bourdon tube systems
- Housing and wetted parts also available in stainless steel (option)

## Technical Specifications

### Type

D3

### Nominal size

100

### Function

The pressures are measured in two independent Bourdon tube systems ("plus" pressure = high pressure, "minus" pressure = low pressure). The pressure is indicated by means of a dial and a pointer. The differential pressure scale covers 50 % of the range of the "plus" pressure and 50 % of the range of the "minus" pressure. The black pointer ("plus" connection) and the red pointer ("minus" connection) at the differential pressure gauge scale allow you to read the pressures in both systems on the fixed scale.

### accuracy class (EN 837-1/6)

1.6

### ranges (EN 837-1/5)

see ordering table

### standard version

#### Connection

Brass, bottom, parallel, one behind the other  
2 x G $\frac{1}{2}$ B, SW22 (EN 837-1/7.3)

### application area

The maximum pressure in the system must not exceed the full scale value. For good readability, the differential pressure to be measured should not be less than approx. 20 % of the full scale value.

### Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.4 \text{ } \%/10 \text{ K}$   
falling temperature approx.  $\pm 0.4 \text{ } \%/10 \text{ K}$   
of full scale value

### Degree of protection

IP 32 (EN 60529)

### Measuring element

Bourdon tube, "C" type tube, Copper alloy

**movement**  
Brass

**Dial**  
Aluminium, white  
dual scale bar outer - mWC inner  
Scaling: black

**Pointer**  
Aluminium, black

**dial**  
Aluminium

**Housing**  
Stainless steel 304

**push on bezel**  
Stainless steel 304


**window**  
Instrument glass

## Options

- wetted parts stainless steel
- Housing and push on bezel stainless steel
- Push on bezel sheet steel, black
- Nominal size 160 (type D1, housing plastic)
- back flange (with stainless steel housing only)
- 3-hole fixing, panel mounting bezel
- throttle screw
- special scales
- other process connections

## Technical Drawings

### Bottom connection

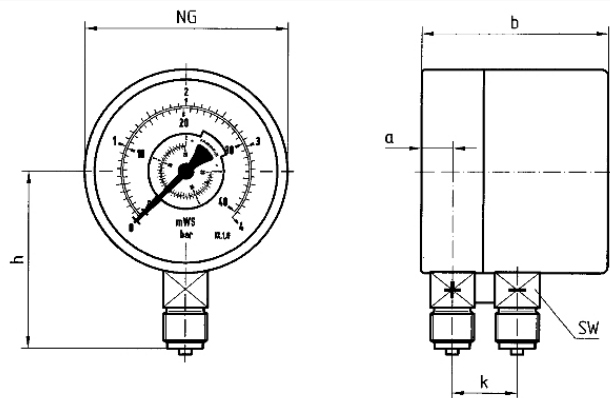

### Dimensions (mm)

| NG  | a    | b  | G   | h  | k  | SW |
|-----|------|----|-----|----|----|----|
| 100 | 15,6 | 84 | G½B | 86 | 32 | 22 |

Versions

| Type             | housing<br>ø | Housing                     | accura-<br>cy class | Connec-<br>tion | Ausrich-<br>tung | Range    | Type     | Type | Part no.                                                                                     |
|------------------|--------------|-----------------------------|---------------------|-----------------|------------------|----------|----------|------|----------------------------------------------------------------------------------------------|
| RF100Dif<br>D301 | 100 mm       | Stain-<br>less<br>steel 304 | 1.6                 | 2 x G½B         |                  | 0/60 bar | RF100Dif | D301 |  85619301 |

-  in-stock items
-  Non-stock items