Standard capsule pressure gauges KP63Dif

Part no. 35521911

Standard capsule type pressure gauges for differential pressure type D9

benefits

- Measurement of extremely small differential pressures
- robust design
- static pressures up to 400 mbar
- direct indication of the differential pressure
- many customised versions available

Application

For differential pressure measurement of non-corrosive, gaseous, dry media. Especially suitable for filter loss measurement in air conditioning and ventilation applications.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type
D9

Nominal size
63

Function
The "plus" pressure (= high pressure) is applied to the inside of the diaphragm. The "minus" pressure (= low pressure) is applied to the inside of the pressure-tight housing. The pressure difference causes the diaphragm to change its shape, thus generating the movement required to measure the pressure. This displacement is picked up by the movement. The differential pressure is directly indicated by a pointer.

accuracy class (EN 837-3/6)
1.6

ranges (EN 837-3/5)
see ordering table

application area
static load: Full scale value
dynamic load: 0.9 x full scale value

Overpressure safety
Full scale value

maximum static pressure
400 mbar

Operating temperature range
Medium: max. 60 °C
Ambient: -20/+60 °C

Temperature performance
Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. ± 0.6 %/10 K
falling temperature approx. ± 0.6 %/10 K
of full scale value

Degree of protection
IP 66 (EN 60529)

standard version

Connection
Brass, centre back, parallel, below each other

Measuring element (wetted part)
Capsule element, CuBe alloy

Movement (wetted part)
Brass

Zero correction
from the front

Seal (wetted part)
NBR (Perbunan)

Dial (wetted part)
Aluminium, black
Scaling: black

Pointer (wetted part)
Aluminium, black

Housing (wetted part)
Stainless steel 304

bayonet bezel
Stainless steel 304

Window (wetted part)
Plastic (PMMA)

Options

- back flange
- 3-hole fixing, panel mounting bezel
- hose connections
- special scales
- other process connections

Technical Drawings

NG 63 – centre back connection

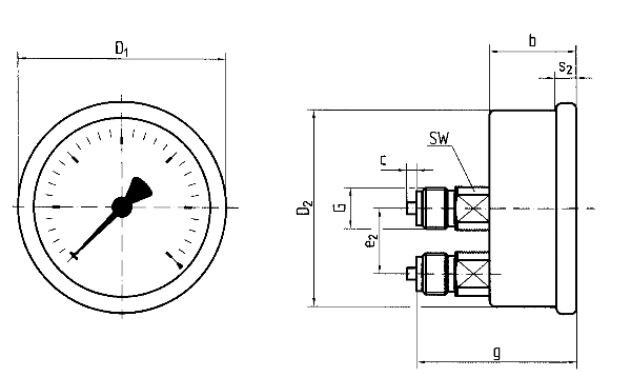

Dimensions (mm)

NG	b	c	D1	D2	e2	g	G	s2	SW
63	30,5	2	68	62	20	53	G¼B	6	14

Versions

		housing ⌀	Housing	accuracy class	Connection	Ausrichtung	Range	Type		Part no.
KP63Dif	D911	63 mm	Stainless steel 304	1.6	2 x G¼B		0/250 mbar	KP63Dif D911	○	35521911

● in-stock items

○ Non-stock items