


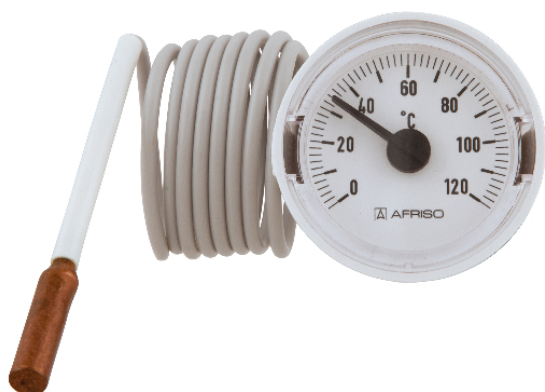

Thermometers with capillary tube

benefits

- ideal for boilers and water heaters
- corrosion-resistant, highly impact-resistant plastic housing
- many customised versions available

Application

Heating and plumbing, e.g. boilers, water heaters, hot water storage tanks

Technical Specifications

Nominal size
37

Range
0/120 °C

Accuracy/test point
50 °C = ± 3 °C

Measuring principle
Liquid filling

Operating temperature range
Medium: Full scale value
Ambient: max. 70 °C

Operating pressure
without pressure

Options

- Dial with customer logo
- various capillary lengths
- special colours for housing, dial, pointer

Degree of protection
IP 32 (EN 60529)

Connection
Probe: $\varnothing$ 6 x 30 mm, Copper
Capillary tube: Copper with PVC coating (R3, grey)


Dial
Plastic, white
Scaling: black

Pointer
Plastic, black

Housing
Plastic (ABS), grey

Bezel
THK 37

Technical Drawings

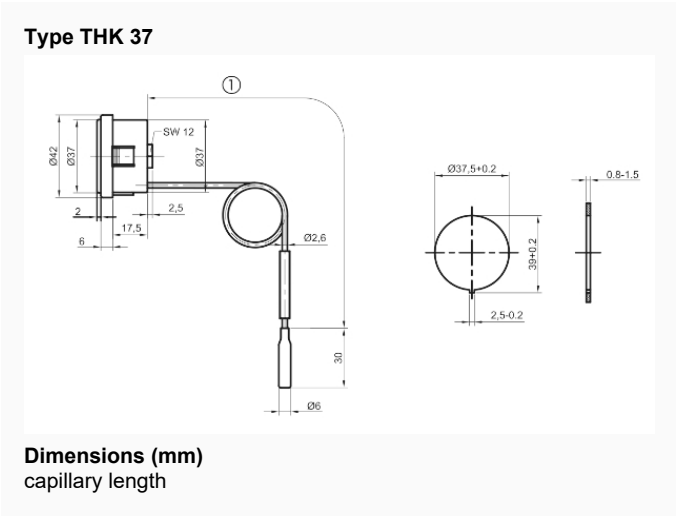

Versions

Nomi- nal size	Nomi- nal size	Hou- sing	push on bezel	Pointer	Dial	Scale	Range	capil- lary length	Type		Part no.
37 mm		grey		black	white	black	0/120 °C	500 mm	THK 37	●	67512105
37 mm		grey		black	white	black	0/120 °C	1000 mm	THK 37	●	67512115
37 mm		grey		black	white	black	0/120 °C	1500 mm	THK 37	●	67512125
37 mm		grey		black	white	black	0/120 °C	2000 mm	THK 37	●	67512135

- in-stock items
- Non-stock items